

Lane/7000

Driving sleek, secure and smart checkout experiences



- Engage consumers with a large multimedia touchscreen and user-friendly HTML5 interface
- Quick and easy payment options to improve checkouts
- Integrate simply into any environment
- Help reduce PCI-DSS audit scope with seamless semi-integrated configuration options





Designed for speed and efficiency, the Lane/7000 creates new points of consumer engagement that improve brand loyalty and drive additional sales.



All payment methods accepted including QR code payment thanks to an optional camera

Designed for fast checkout in retail:

- Large capacitive screen
- Clear contactless zone
- Large white backlit keypad
- Payment methods illuminated


Large 5" color touchscreen and ergonomic interface

Highest security:

- PCI PTS
- Optional PCI compliant privacy shield
- Detection of abnormal cable removal to alert and inhibit the terminal in the case of threat
- Anti-theft Kensington lock

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

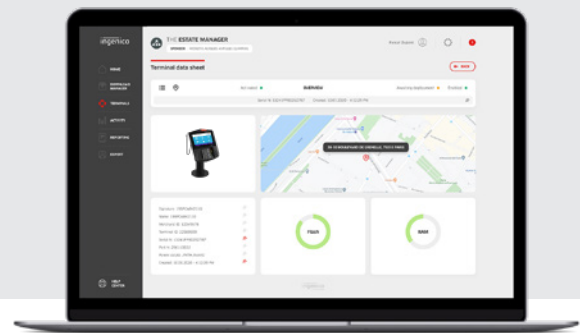

Processor	• Crypto & Applications Processor	• Cortex A5	✓
Memory	• Internal	• 512 MB Flash, 512 MB RAM	✓
	• External	• Micro SD up to 32 GB	Option
OS		• Telium TETRA HTML5	✓
SAM		• 3	Option
Card Reader(s)	• Magstripe (dual head)	• ISO1/2/3, 500K reads lifespan	✓
	• Smart Card	• EMV Level 1, 500K reads lifespan	✓
	• Contactless	• EMV Level 1 compliant	✓
Display	• Colour	• 5" backlight WVGA, TN* display (800x480)	✓
		• 5" backlight WVGA, AWVA** display (800x480)	Option
Touchscreen	• Capacitive	• Finger & stylus (1000K lifespan signature)	✓
Stylus	• Passive	• Tethered included	✓
Keypad		• 15 keys, raised markings, backlit	✓
Camera		• 5M pixels autofocus (QR code library embedded)	Option
Audio	• Buzzer		✓
	• Audio Jack	• Stereo	Option
	• Speaker	• Mono	Option

Terminal Connectivity	• Wired	• Ethernet 10/100 base T	✓
	• Wireless	• Ethernet switch	Option
		• WIFI and Bluetooth	Option
Terminal Connections	• USB	• USB Host	✓
		• 2nd USB Host	Option
	• Serial	• USB Slave	✓
	• Powered USB	• 1 RS232	✓
	• Powered RS 232	• 12 V (USB retail)	✓
	• Powered Ethernet	• 12 V	✓
		• PoE 802.3af compliant	Option
	• External Power Supply		Option
Stand Mounting		• Universal Payment Mount	✓
Terminal Size		• 180 x 152 x 35,2 mm (7.44" x 5.98" x 1.38")	✓
Weight		• 583g (20,56oz)	✓
		• 796g (28,08oz)	✓
Environment	• Operating temperature	• 0 to +50°C (32°F to 122°F)	✓
	• Storage temperature	• -20 to +70°C (-4°F to 131°F)	✓
	• Relative humidity	• 85% HR at +40°C (104°F)	✓
Accessories	• Privacy shield	• PCI compliant	✓
Security	• PCI PTS	• PCI PTS 6.x and 5.x certified	✓
	• Anti-removal	• Active connector removal	✓
	• Anti-theft	• Kensington lock receptacles	✓
		• Secure mounts available	Option



UCP Inc.
www.ucp-inc.com

7200 W Post Rd Suite 100, Las Vegas, NV, 89113

Tel.702-802-3504 Email.
info@ucp-inc.com

